



FINISHING

FINISHING



Index

Sanders	74-80
Polishers	81-82
Finishing Accessories	83-86



The Best Way To A Great Finish

Today's manufacturing techniques are constantly changing and improving. This has increased the demands for sanders, polishers and buffers, making them a key segment of the process. Improvements in the industry now result in less waste on castings and molded parts, which shifts the emphasis from material removal to surface finishing. Sioux Tools offers a complete line of state-of-the-art orbital sanders, polishers and buffers that will produce the quality finish you require on your final product.

Sioux sanders are engineered to cover the full range of applications in metal, composite, and wood finishing. Our innovative, lightweight designs ensure they perform to the highest standards while still being comfortable to operate. Each delivers unsurpassed power and performance, resulting in the perfect finish.

Fit to your application

Different applications require different finishing tools. That's why Sioux Tools offers a variety of sanders and polishers with a wide range of configurations.

The 890 Series Random Orbital Sanders come with an orbit diameter of either 3/16" (5 mm) or 3/32" (3 mm) and a choice of non-vacuum, self-contained Venturi vacuum or remote vacuum ready.

Variety to choose from

We also offer pistol grip, right angle, vertical, and straight sanders and polishers and jitterbug sanders. Many of these come with your choice of throttle controls that allow the operator to work the way that's most comfortable.



Finishing Safety

Flying particles can cause eye injury. Proper eye protection must be worn at all times by tools user and bystanders.

A grinding wheel that bursts can cause injury or



death. Never mount a grinding wheel or a cutoff wheel on a sander or polisher.

Breathing grinding dust can cause injury. Do not breathe grinding dust. Use approved mask.

Sanders and polishers that do not come to a complete stop before setting aside can cause injury. Be sure the tool has come to a complete stop before setting it aside.

Explosions and fires can cause injury. Only sand metal if the area is free of combustible or explosive materials or vapors.

Contact with sanding disks can cause injury. Wear protective clothing and gloves to protect hands. Keep hands and other body parts away from sanding pads and disks to prevent cutting or pinching.

Sanding or polishing pads, disks or accessories that burst can cause injury. Make sure disks or accessories have a higher speed rating than the tool. Do not exceed rated air pressure.

Prolonged exposure to vibration or an excessive exposed portion of the edge of a disk can cause injury. When using self adhesive sanding disks, make sure to mount them concentrically on the pad.

Tools starting unexpectedly can cause injury. Always remove tool from air supply and activate trigger to bleed air line before making any adjustments, changing accessories, or doing any maintenance or service on tool.

Tools that perform unpredictably can cause injury. Use only sanding and polishing pads, disks and accessories provided or specified by Sioux Tools.

DRILLS

ASSEMBLY

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES



890 SERIES RANDOM ORBITAL SANDERS

Performance:

Power: 0.25 hp (0.19 kw)

Speed: 12,000 rpm

Features:

3/32" (3 mm) & 3/16" (5 mm) Orbit Diameters

Built-in Speed Control

Cushion Grip

Rotatable Exhaust Deflector (Non-vacuum)

Non-vacuum, Venturi Vacuum and Remote Vacuum



890F

890HPV



890HPVV



Model Number		Free Speed	Pad Size		Orbit Diameter		Weight		Height		Air Consumption Free Speed		Sound Level
PSA Pad ¹	H & L Pad ²	rpm	in.	mm	in.	mm	lb	kg	in.	mm	cfm	l/s	dB(A)
0.25 hp (0.19 kw) - Non-Vacuum													
▶ 890HP	890HPJ	12,000	5	125	3/16	5	1.7	0.8	3.6	91	18	8	78
▶ 890F	890FJ	12,000	5	125	3/32	3	1.7	0.8	3.6	91	18	8	78
▶ 897HP	897HPJ	12,000	6	150	3/16	5	1.7	0.8	3.6	91	18	8	78
▶ 897F	897FJ	12,000	6	150	3/32	3	1.7	0.8	3.6	91	18	8	78
0.25 hp (0.19 kw) - Self-contained Venturi Vacuum													
▶ 890HPVV	890HPJVV	12,000	5	125	3/16	5	1.7	0.8	3.6	91	18	8	78
▶ 890FVV	890FJVV	12,000	5	125	3/32	3	1.7	0.8	3.6	91	18	8	78
▶ 897HPVV	897HPJVV	12,000	6	150	3/16	5	1.7	0.8	3.6	91	18	8	78
▶ 897FVV	897FJVV	12,000	6	150	3/32	3	1.7	0.8	3.6	91	18	8	78
0.25 hp (0.19 kw) - Remote Vacuum Ready													
▶ 890HPV	890HPJV	12,000	5	125	3/16	5	1.7	0.8	3.6	91	18	8	78
▶ 890FV	890FJV	12,000	5	125	3/32	3	1.7	0.8	3.6	91	18	8	78
▶ 897HPV	897HPJV	12,000	6	150	3/16	5	1.7	0.8	3.6	91	18	8	78
▶ 897FV	897FJV	12,000	6	150	3/32	3	1.7	0.8	3.6	91	18	8	78

General:

Air Inlet Size: 1/4" NPT

Recommended Hose Size: 3/8" (10 mm)

Performance rated @ 90 psig (6.2 bar) air pressure

Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual

Comfort Grip

Backing Pad & Wrench

Accessories:

Sander Accessories, see pages 83-86

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.

¹ PSA (Pressure Sensitive Adhesive)

² H & L (Hook and Loop)

SAFETY Precaution: Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



600 AND 700 SERIES RANDOM ORBITAL SANDERS

Performance:

Power: 0.40 hp (0.30 kw)

Speed: 10,000 rpm

Features:

3/16" (5 mm) Orbit Diameter

Built-in Speed Control

Aluminum Housing

Palm and Lever Throttle

Composite Rotor & End Plate (700 series)



790



658



Model Number		Free Speed	Pad Size		Orbit Diameter		Weight		Height		Air Consumption		Sound Level
PSA Pad ²	H & L Pad ³	rpm	in.	mm	in.	mm	lb	kg	in.	mm	cfm	l/s	dB(A)
0.40 hp (0.30 kw) - Palm Throttle													
▶ 790	790J	10,000	5	125	3/16	5	2.6	1.2	4.2	107	20	9	85
▶ 797	797J	10,000	6	150	3/16	5	2.6	1.2	4.2	107	20	9	85
0.40 hp (0.30 kw) - Dual Action - Lever Throttle													
758	758J	10,000	5	125	3/16	5	2.9	1.3	4.2	107	20	9	85
760	760J	10,000	6	150	3/16	5	2.9	1.3	4.2	107	20	9	85
0.40 hp (0.30 kw) - Palm Throttle													
▶ 690 ¹		10,000	5	125	3/16	5	2.9	1.3	4.2	107	20	9	85
▶ 697 ¹		10,000	6	150	3/16	5	2.9	1.3	4.2	107	20	9	85
0.40 hp (0.30 kw) - Dual Action - Lever Throttle													
▶ 658 ¹		10,000	5	125	3/16	5	3.2	1.5	4.2	107	20	9	85
▶ 660 ¹		10,000	6	150	3/16	5	3.2	1.5	4.2	107	20	9	85

General:

Air Inlet Size: 1/4" NPT
 Recommended Hose Size: 3/8" (10 mm)
 Performance rated @ 90 psig (6.2 bar) air pressure
 Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual
 Comfort Grip (790 series)
 Pad & Wrench

Accessories:

Sander Accessories, see pages 83-86

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.

For self-contained venturi vacuum add suffix VV

For remote vacuum ready add suffix V

¹ Not CE Certified

² PSA (Pressure Sensitive Adhesive)

³ H & L (Hook and Loop)

SAFETY Precaution: Read and follow all safety and operating instructions.



WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



DRILLS

PISTOL GRIP SANDERS

Performance:

Power: 0.90 hp (0.67 kw)

Speed: 14,000 rpm - 20,000 rpm

ASSEMBLY

Features:

Trigger Start

Down-handle Exhaust

Comfort Grip

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES



CE

Model Number	Free Speed	Weight		Length		Air Consumption Free Speed		Sound Level
	rpm	lb	kg	in.	mm	cfm	l/s	dB(A)
0.90 hp (0.67 kw) - 5" (125 mm) Diameter Backing Pad								
540ESS	14,000	1.7	0.8	4.4	112	30	14	77
0.90 hp (0.67 kw) - 1/4" Collet								
540ESC	20,000	1.7	0.8	4.4	112	30	14	77
540ESSC	14,000	1.7	0.8	4.4	112	30	14	77

General:

Air Inlet Size: 1/4" NPT

Recommended Hose Size: 3/8" (10 mm)

Performance rated @ 90 psig (6.2 bar) air pressure

Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual

Comfort Grip

3" (75 mm) & 5" (125 mm) Backing Disc (ES series)

Retaining Nut & Wrench (ES series)

Collet & Wrench (ESC series)

Accessories:

Sander Accessories, see pages 83-86

To order tool with 6 mm collet add M6 suffix to model number

SAFETY Precaution: Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



1/3 HP RIGHT ANGLE SANDERS

Performance:

Power: 0.33 hp (0.25 kw)

Speed: 12,000 rpm - 20,000 rpm

Features:

Lockoff Lever Throttle

Front, Rear, and Vacuum Exhaust

Comfort Grip



Model Number	Free Speed rpm	Weight		Length		Air Consumption Free Speed		Sound Level dB(A)	Exhaust
		lb	kg	in.	mm	cfm	l/s		
0.33 hp (0.25 kw) - 1/4" Collet									
▶ 1DA211	20,000	1.2	0.5	6.0	152	17	8	87	Front
1DA212	20,000	1.2	0.5	6	152	17	8	87	Front
1DA221	20,000	1.2	0.5	6.0	152	17	8	82	Rear
1DA222	20,000	1.2	0.5	6	152	17	8	82	Rear
1DA311	12,000	1.2	0.5	6.0	152	17	8	87	Front
1DA321	12,000	1.2	0.5	6.0	152	17	8	82	Rear
0.33 hp (0.25 kw) - 1/4"-20 External Spindle Thread									
1DA315	12,000	1.2	0.5	6.0	152	17	8	87	Front
1DA325	12,000	1.2	0.5	6.0	152	17	8	82	Rear
0.33 hp (0.25 kw) - 1/4"-28 Internal Spindle Thread									
1DA314	12,000	1.2	0.5	6.0	152	17	8	87	Front
0.33 hp (0.25 kw) - 1/4" Collet - 2" Venturi Vacuum									
1DA251	20,000	1.6	0.7	6.0	152	17	8	84	Vacuum
1DA341	12,000	1.6	0.7	6	152	17	8	84	Vacuum
1DA351	12,000	1.6	0.7	6.0	152	17	8	84	Vacuum
0.33 hp (0.25 kw) - 1/4" Collet - 3" Venturi Vacuum									
1DA361	12,000	1.6	0.7	6.0	152	17	8	84	Vacuum

General:

Air Inlet Size: 1/4" NPT
 Recommended Hose Size: 3/8" (10 mm)
 Performance rated @ 90 psig (6.2 bar) air pressure
 Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual
 Comfort Grip
 Collet & Collet Wrenches (as required)
 Angle Head Lubricant

Accessories:

Sander Accessories, see pages 83-86

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.

To order tool with 6 mm collet, add M6 suffix to model number



SAFETY Precaution: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

DRILLS

ASSEMBLY

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES



DRILLS

RIGHT ANGLE SANDERS

Performance:

Power: 0.80 hp (0.60 kw) - 1.0 hp (0.75 kw)
 Speed: 6000 rpm - 12,000 rpm



1965

ASSEMBLY

Features:

Governed & Non-governed
 Lockoff Lever & Thumb Throttle
 Spindle Lock (1280 series)



1287L

ABRASIVE



1965V-5/8

FINISHING

Model Number	Free Speed	Pad Diameter		Weight		Length		Air Consumption Under Load		Air Consumption Free Speed		Sound Level	Spindle Thread
	rpm	in.	mm	lb	kg	in.	mm	cfm	l/s	cfm	l/s	dB(A)	
0.80 hp (0.60 kw) - Lockoff Lever Throttle - Rear Exhaust													
▶ 1965	12,000	5	125	2.4	1.1	8.0	203	25	12	32	15	85	3/8"-24
▶ 1965V-5/8	12,000	5	125	2.4	1.1	8.0	203	25	12	32	15	85	5/8"-11
0.90 hp (0.67 kw) - Lockoff Lever Throttle - Rear Exhaust													
▶ 1965VV-5/8	12,000			2.4	1.1	8	2.3	25	12	32	15	85	3/8"-24
1.0 hp (0.75 kw) - Governed Speed Control - Lockoff Lever Throttle													
▶ 1287L ¹	6000	7	175	5.9	2.7	11.3	287	35	17	18	8	85	5/8"-11
1.0 hp (0.75 kw) - Governed Speed Control - Thumb Throttle													
▶ 1287 ¹	6000	7	175	2.4	1.1	8.0	203	35	17	18	8	85	5/8"-11

PERCUSSIVE

General:

Air Inlet Size: 1/4" NPT
 Recommended Hose Size: 3/8" (10 mm)
 Performance rated @ 90 psig (6.2 bar) air pressure
 Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual
 Spindle Wrench (1965 series)
 Support Handle
 Backing Pad & Nut

Accessories:

Sander Accessories, see pages 83-86

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.

SPECIALTY

¹ Not CE Certified

ACCESSORIES

SAFETY Precaution: Read and follow all safety and operating instructions.



WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



VERTICAL SANDERS

Performance:

Power: 1.0 hp (0.75 kw) - 3.0 hp (2.2 kw)

Speed: 5000 rpm - 7000 rpm

Features:

Governed & Non-governed

Lever & Thumb Throttle

Side Exhaust

Overspeed Shutoff Protection (V series)



Model Number	Free Speed	Pad Diameter		Weight		Height		Air Consumption Under Load		Air Consumption Free Speed		Sound Level dB(A)	Spindle Thread
	rpm	in.	mm	lb	kg	in.	mm	cfm	l/s	cfm	l/s		
1.0 hp (0.75 kw) - Thumb Throttle													
▶ 1290 ³	5000	7	175	4.1	1.9	7.2	183	30	14	38	18	80	5/8"-11
1.0 hp (0.75 kw) - Lockoff Thumb Throttle													
1290LK	6000	7	175	4.1	1.9	7.2	183	30	14	38	18	80	5/8"-11
1.0 hp (0.75 kw) - Lever Throttle													
▶ 1290L ²	6000	7	175	4.1	1.9	7.2	183	30	14	38	18	80	5/8"-11
3.0 hp (2.2 kw) - Governed Speed Control - Thumb Throttle													
V5147 ¹	7000	7	175	9.1	4.1	7.1	180	60	28	22	10	84	5/8"-11
3.0 hp (2.2 kw) - Governed Speed Control - Lockoff Lever Throttle													
V5247 ¹	7000	7	175	9.1	4.1	7.1	180	60	28	22	10	84	5/8"-11
V5238 ¹	6000	9	230	9.1	4.1	7.1	180	60	28	22	10	82	5/8"-11

General:

Air Inlet Size: 1/4" NPT (1290 series); 1/2" NPT (V series)
 Recommended Hose Size: 3/8" (10 mm) (1290 series); 1/2" (13 mm) (V series)
 Performance rated @ 90 psig (6.2 bar) air pressure
 Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual
 Spindle Wrenches
 Backing Pad & Nut

Accessories:

Sander Accessories, see pages 83-86

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.

¹ Not CE Certified

² For lever on top, order model 1290LT

³ For self-contained venturi vacuum, order model 1290VV



SAFETY Precaution: Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



DRILLS

STRAIGHT SANDERS

Performance:

Power: 0.6 hp (0.25 kw)

Speed: 900 rpm - 5800 rpm

ASSEMBLY

Features:

Lockoff Lever Throttle

Rear Exhaust

Support Handle


ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES

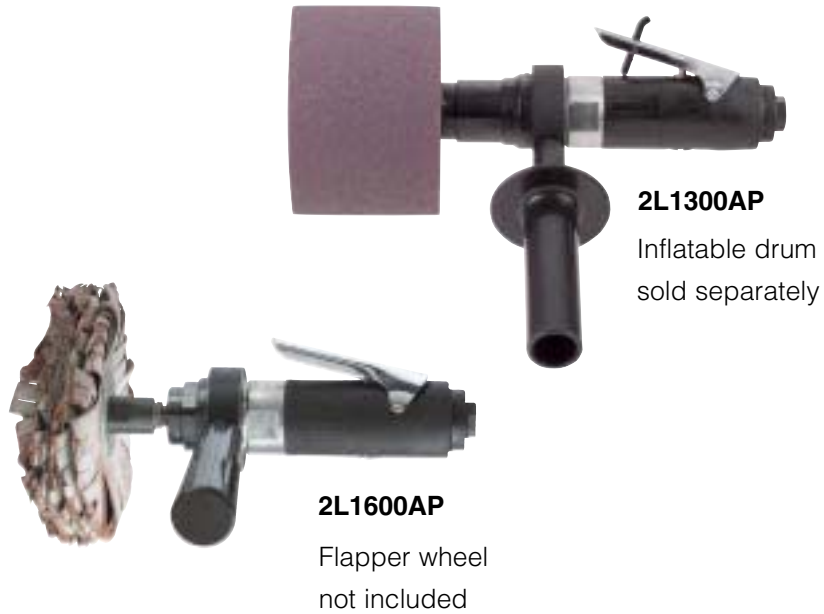

Model Number	Free Speed	Weight		Length		Air Consumption Under Load		Air Consumption Free Speed		Sound Level
	rpm	lb	kg	in.	mm	cfm	l/s	cfm	l/s	dB(A)
0.60 hp (0.25 kw) - 1/2"-13 Spindle Thread										
2L1100AP	900	2.9	1.3	6.0	152	21	10	28	13	82
2L1200AP	1600	2.9	1.3	6.0	152	21	10	28	13	82
2L1600AP	2000	2.3	1.0	6.0	152	21	10	28	13	82
2L1300AP	3350	2.3	1.0	6.0	152	21	10	28	13	82
0.60 hp (0.25 kw) - 3/8"-24 Spindle Thread										
2L1100AP38	900	2.9	1.3	6.0	152	21	10	28	13	82
2L1200AP38	1600	2.9	1.3	6.0	152	21	10	28	13	82
2L1600AP38	2000	2.3	1.0	6.0	152	21	10	28	13	82
2L1300AP38	3350	2.3	1.0	6.0	152	21	10	28	13	82

General:
 Air Inlet Size: 1/4" NPT
 Recommended Hose Size: 3/8" (10 mm)
 Performance rated @ 90 psig (6.2 bar) air pressure
 Tools available with BSPT air inlet upon request

Standard Equipment:
 Parts list, Safety and Instruction manual
 Support Handle
 Mounting Washers & Nut
Accessories:
 Sander Accessories, see pages 83-86



RIGHT ANGLE POLISHERS

Performance:

Power: 1.0 hp (0.75 kw)

Speed: 3000 rpm

Features:

Governed Speed Control

Lockoff Lever & Thumb Throttle

Spindle Lock

Remote Exhaust



1238



1238L

Model Number	Free Speed	Pad Diameter		Weight ¹		Length		Air Consumption Under Load		Air Consumption Free Speed		Sound Level	Spindle Thread
	rpm	in.	mm	lb	kg	in.	mm	cfm	l/s	cfm	l/s	dB(A)	
1.0 hp (0.75 kw) - Lockoff Lever Throttle													
1238L	3000	8	200	7.9	3.6	11.3	287	33	16	16	8	75	5/8"-11
1.0 hp (0.75 kw) - Thumb Throttle													
1238	3000	8	200	7.9	3.6	11.3	287	33	16	16	8	75	5/8"-11

General:
 Air Inlet Size: 1/4" NPT
 Recommended Hose Size: 3/8" (10 mm)
 Performance rated @ 90 psig (6.2 bar) air pressure
 Tools available with BSPT air inlet upon request

Standard Equipment:
 Parts list, Safety and Instruction manual
 Remote Exhaust
 Support Handle
 Backing Pad & Nut
 Wool Polishing Pad
Accessories:
 Polisher Accessories, see pages 83-86

¹ Weight includes pad & holder



SAFETY Precaution: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



DRILLS

VERTICAL POLISHERS

Performance:

Power: 1.0 hp (0.75 kw)

Speed: 2000 rpm - 3000 rpm

ASSEMBLY

Features:

Lever & Thumb Throttle

Side Exhaust

Comfort Grips

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES



1292



1292L



Model Number	Free Speed	Pad Diameter		Weight ¹		Height		Air Consumption Under Load		Air Consumption Free Speed		Sound Level	Spindle Thread
	rpm	in.	mm	lb	kg	in.	mm	cfm	l/s	cfm	l/s	dB(A)	
1.0 hp (0.75 kw) - Thumb Throttle													
1296	2000	8	200	4.1	1.9	7.1	180	30	14	38	18	80	5/8"-11
1292	3000	8	200	4.1	1.9	7.1	180	30	14	38	18	80	5/8"-11
1.0 hp (0.75 kw) - Lever Throttle													
1292L	3000	8	200	4.1	1.9	7.1	180	30	14	38	18	80	5/8"-11

General:

Air Inlet Size: 1/4" NPT

Recommended Hose Size: 3/8" (10 mm)

Performance rated @ 90 psig (6.2 bar) air pressure

Tools available with BSPT air inlet upon request

Standard Equipment:

Parts list, Safety and Instruction manual

Spindle Wrenches

Backing Pad & Nut

Polishing Pad

Accessories:

Polisher Accessories, see pages 83-86

▶ The quick ship icon indicates our most popular models, selected for their "off-the-shelf" availability from a Sioux Authorized Distributor or distribution warehouse. See page 9 for more information on Quick Ship.

¹ Weight includes pad & holder

SAFETY Precaution: Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



Spindle Adapter Kits

For use on 2L series straight sanders



Part Number	Adapts Spindle Threads		Length	
	From	To	in.	mm
500	3/8"-24"	1/2"-13"	3	76
500A	1/2"-20"	1/2"-13"	3	76

Includes spindle adaptor, washers, and nut

Comfort Grips



Part Number	Description	For Use On
68055	Cushion Grip	890, 897 series
66667	Cushion Grip	790 series

Support Handle

Part No. 2362

For use on 2L series straight sanders



Support Handle

Part No. 2359

For use on 1965, 1965-5/8"



Support Handle

Part No. 2357

For use on 1965, 1965-5/8" sanders



Inflatable Sanding Drum

Part No. 504

For use on 2L series straight sanders



3-1/2" x 5" Abrasive Belts

For use on 2L series straight sanders



Part Number	Grit
523DA	50
522DA	80
521DA	120
520DA	180

Speed-Lok Backing Pads


For use on 1DA series, 540ESC series sanders



Part Number	Diameter		Shank Size
	in.	mm	
587M	2	50	1/4"
588M	3	75	1/4"

Speed-Lok Abrasive Discs

For use on 1DA series, 540ESC series sanders

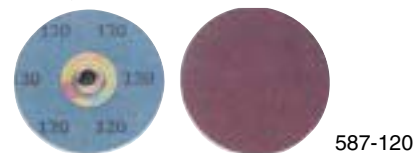

Part Number	Diameter		Grit
	in.	mm	
587-60	2	50	60
587-120	2	50	80
588-60	3	75	60
588-120	3	75	120



SAFETY Precaution: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

DRILLS

ASSEMBLY

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES



DRILLS

ASSEMBLY

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES

Orbital Sander Backing Pads

Sioux random orbital backing pads are medium density, urethane pads rated for speeds up to 13,000 rpm. The 5" pads are a 3/8" thick with low profile design, while the 6" pads are 5/8" thick with tapered profile for fine feathering in corners or around edges.



593



593V



594



594V

Part Number	Diameter		Backing	Profile	Style
	in.	mm			
593	5	125	PSA ¹	Low	Non-Vac
593V	5	125	PSA ¹	Low	Vacuum
593J	5	125	H&L ²	Low	Non-Vac
593JV	5	125	H&L ²	Low	Vacuum
594	6	150	PSA ¹	Tapered	Non-Vac
594V	6	150	PSA ¹	Tapered	Vacuum
594J	6	150	H&L ²	Tapered	Non-Vac
594JV	6	150	H&L ²	Tapered	Vacuum

¹PSA - Vinyl face for pressure sensitive adhesive sanding discs
²H&L - Hook and loop face

Pressure Sensitive Adhesive Discs

For use on 690, 790, 890 series sanders
 Packaged in cartons of 100



520P



578P

Part Number	Diameter		Grit	Features
	in.	mm		
519P	5	125	240	
520P	5	125	180	
521P	5	125	100	
519PV	5	125	240	Vacuum pickup holes
520PV	5	125	180	Vacuum pickup holes
521PV	5	125	100	Vacuum pickup holes
577P	6	150	240	
578P	6	150	180	
579P	6	150	100	
577PV	6	150	240	Vacuum pickup holes
578PV	6	150	180	Vacuum pickup holes
579PV	6	150	100	Vacuum pickup holes

7" (175 mm) Sanding Kits

For use on 1287, 1287L, 1290, 1290L



545H

Part Number	Description
545 Standard Kit	
544	Disc holder
548	Backing disc
542	Retainer
524	Retaining nut
545H Heavy-Duty Kit	
544	Disc holder
548H	Heavy-duty backing disc
542	Retainer
524	Retaining nut

Fibre Backing Discs

Part No. 586

For use on 540ESS series sander
 Packaged in cartons of 6
 Qty 3 - 3" (75 mm)
 Qty 3 - 4-1/2" (110 mm)



Backing Pads

For use on 1287, 1287L, 1290, 1290L



2344


Part Number	Diameter		For Use On
	in.	mm	
2344*	5	125	1965
2364*	5	125	1965-5/8

* Includes disc nut 563

SAFETY Precaution: Read and follow all safety and operating instructions.



Vacuum Conversion Kits

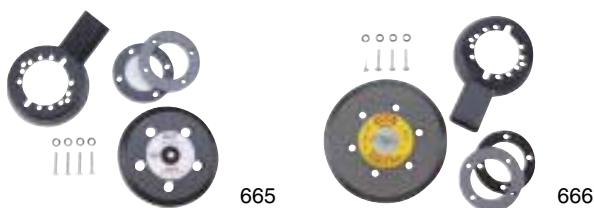

Part Number	For Use On
665	658, 690, 758, 790
666	660, 697, 760, 797

Vacuum Hose Assembly

Part No. 855

For use on 1DA series venturi-vac



Cloth Vacuum Bag

Part No. 911A

For use on 1DA series Venturi-Vac, 690V, 697V, 790V, 797V, 890HPVV, 897HPVV



Disposable Vacuum Bag

Part No. 912

For use on 1DA series Venturi-Vac, 690V, 697V, 790V, 797V, 890HPVV, 897HPVV



Vacuum Hose Assembly

Part No. 894

For use on 690V, 790V, 890HPV, 897HPV

Includes 895 hose cuff

Size: 1-1/4" (32 mm) x 12' (3.6 m)



Vacuum Hose Assembly

Part No. 853

For use on 690VV, 790VV, 890HPVV, 897HPVV

Length: 6' (1.8 m)



Remote Exhaust Kit

For use on 1DA and 1DS series



Part Number	Description
3304	Remote Exhaust Kit

Remote Vacuum Conversion Kit

For use on 1DA series sanders



Part Number	Diameter	
	in.	mm
856-2	2	50
856-3	3	75

Polishing Accessories



Part Number	Description	For Use On
846C*	Backing pad (includes 524)	
1211*	Wool polishing pad	
524*	Retaining nut	
847	Hook & loop backing pad	1238, 1238L,
1220	Hook & loop polishing pad	1292, 1292L
843T	Tie-on wool bonnet (pkg 10)	
1214	Polishing pad cleaning tool	

* Standard equipment on polishers



SAFETY Precaution: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

DRILLS

ASSEMBLY

ABRASIVE

FINISHING

PERCUSSIVE

SPECIALTY

ACCESSORIES

